

# Airtight Part "L" Hinge down


## AT35/AT25/AT15

MADE IN  
THE UKKEY LOCKABLE  
AVAILABLEPART L  
COMPLIANTAIR  
TESTED

KEY LOCK AVAILABLE

Patent Application No.  
1407745.7

- Airtight at 50Pa of positive or negative air pressure
- GWP and ODP rating of zero
- Exceeds NHBC requirements
- Spring loaded "easy to open" high compression catch
- Inner & outer neoprene memory draught seals
- Invisible pre-fitted hinges for a quick easy installation
- Robust long lasting zintec steel design
- Smooth white satin powder coated in RAL 9010
- Slim frame for contemporary unobtrusive aesthetics
- Projects into the ceiling space a mere 2mm
- Air seals without the use of sealant or caulking
- Three models exceeding Part "L"

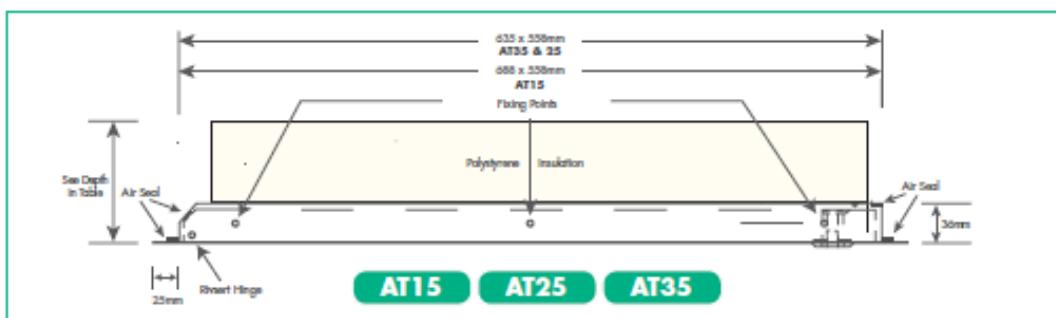

CODE	STRUCTURAL OPENING	CLEAR OPENING ONCE INSTALLED	"U" VALUE	DEPTH	WEIGHT
AT35	640 x 560	538 x 520	0.35	100mm	4.5kg
AT25	640 x 560	538 x 520	0.25	100mm	4.8kg
AT15	690 x 560	538 x 520	0.15	150mm	5.4kg

\* Postfix for key lockable version E.G. AT35L