


WOODEN
DOORS



HIGHLY ENERGY-EFFICIENT WOODEN DOORS

The **DWT** highly energy efficient L-shaped doors are designed primarily for installation in L-shaped walls, provide access to the room behind and at the same time constitute an excellent barrier against heat loss (heat transfer coefficient $U = 0.6 \text{ W / m}^2\text{K}^*$) and guarantee high tightness. The door can be installed in the right or left side. They are as standard equipped with wooden architrave lining in natural colour.

DWT
HIGHLY ENERGY
EFFICIENT

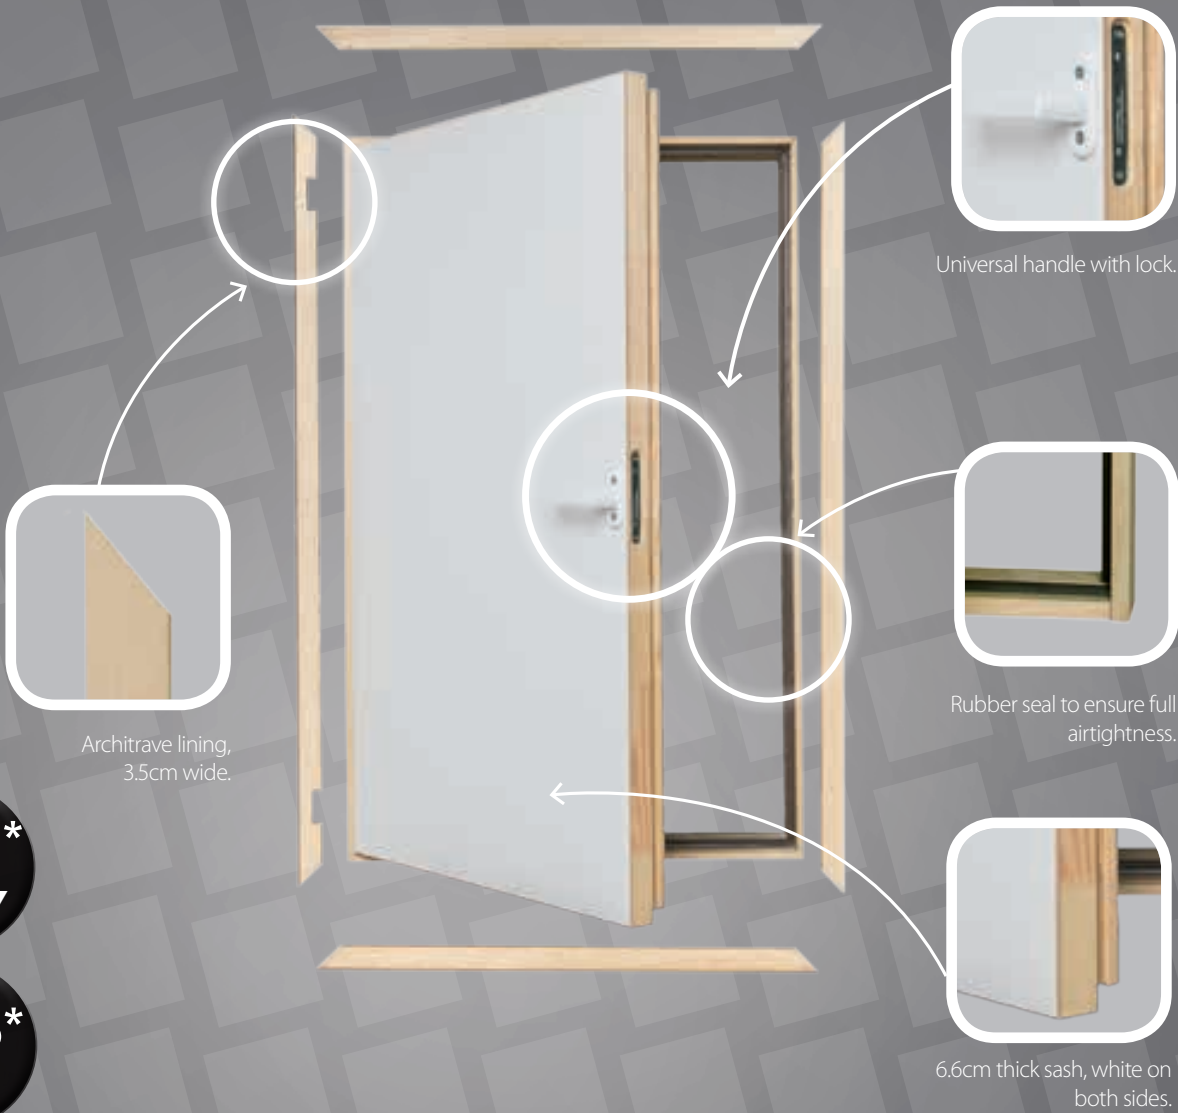

4 CLASS*
EN12207

U=0.6*
W/m²K

*manufacturer's own data



architrave lining



Technical specification:


heat transmission coefficient $U = 0.6 \text{ W / m}^2\text{K}$
insulation thickness 6 cm

fully assembled,
and ready for quick
installation in the ceiling



3 years
WARRANTY

DWT DOOR DIAGRAM

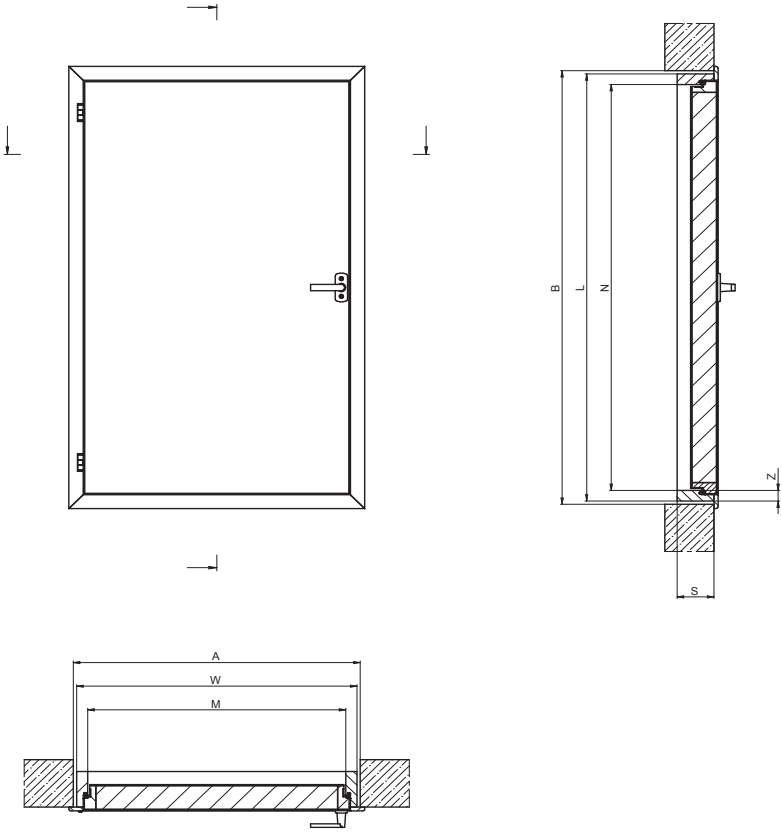

DWT L-SHAPED DOORS DIMENSIONS

Opening dimensions [cm]	AxB	55x80	60x80	60x100	60x110	70x90	70x100	70x110
Door dimensions [cm]	WxL	53.4x78.4	58.4x78.4	58.4x98.4	58.4x108.4	68.4x88.4	68.4x98.4	68.4x108.4
Frame internal dimensions [cm]	MxN	48x73	53x73	53x93	53x103	63x83	63x93	63x103
Frame width [cm]	S	9						
Frame thickness [cm]	Z	2.7						

L-SHAPED DOORS

Commercial sizes [cm]	55x80	60x80	60x100	60x110	70x90	70x100	70x110
Code	869600	869622	869624	869625	869633	869634	869635

DWT doors are available only in sizes shown above.